



cab

Printer XD4 T

Double side printing

- Uses two print modules to print on both sides of paper, card board, textile, plastic film and even flat synthetic tubes at the same time
- 300 dpi resolution printhead
- Maximum Print width 4 Inches ; Print speed : 30 to 125 mm /sec.
- Material width : Minimum 10mm and Maximum 110mm
- Media is centre justified and hence no need to adjust the printhead for different material width
- Uses environmentally friendly materials
- Fast processing (266 MHZ)
- Large memory (64 MB RAM & 8 MB IFFS)
- Interfaces :
 - Standard : RS232C, Ethernet TCP/IP and USB
 - Optional : RS422/485 and Centronics
- Availability of Optional Cutter, Perforation Cutter and Stacker with Cutter

Label Printers MT series



Material guide centered with separator



The Textile Printer

- Easily prints on labels or continuous materials that are wound on rolls or reels
- As regards the label width, no adjustment of the plungers is needed
- Width-adapted print rollers are provided for slim materials

Label printer		SQUIX 4.3 MT	SQUIX 4 MT	
Printable resolution	dpi	300	300	600
Print speed	up to mm/s	250	300	150
Print width	up to mm	108.4	105.7	105.7

1 Ribbon holder

Easy insertion of the ribbons is enabled with the three-part tightening axles. A preprinted ruler simplifies the adjustment.

2 Roll holder

When setting the margin stop, the material roll is automatically centered. If rolls with 100 mm core diameter are processed, an adapter is recommended.

3 Plungers

Both plungers are fixed for all material widths. No print head settings or adjustments are necessary.

4 Antistatic brush

Particularly with plastic materials the electrostatic charge is discharged after printing

5 Separator

At high heat energy the ribbon can stick with the textile tape. A roller reliably separates the material from the ribbon.

6 Material guide


The material guide just in front of the print roller provides accurate imprint. The material width is adjusted with a spindle.

7 Print rollers' coating

Synthetic rubber is standard for accurate imprint; silicone is available as an option for an extra long service life at a higher imprint tolerance

8 Slim print rollers

In order to achieve accurate imprint with slim materials and ribbons, also slim print rollers are needed. These prevent from print roller wear, print head contamination and errors during material feed. Coating: synthetic rubber

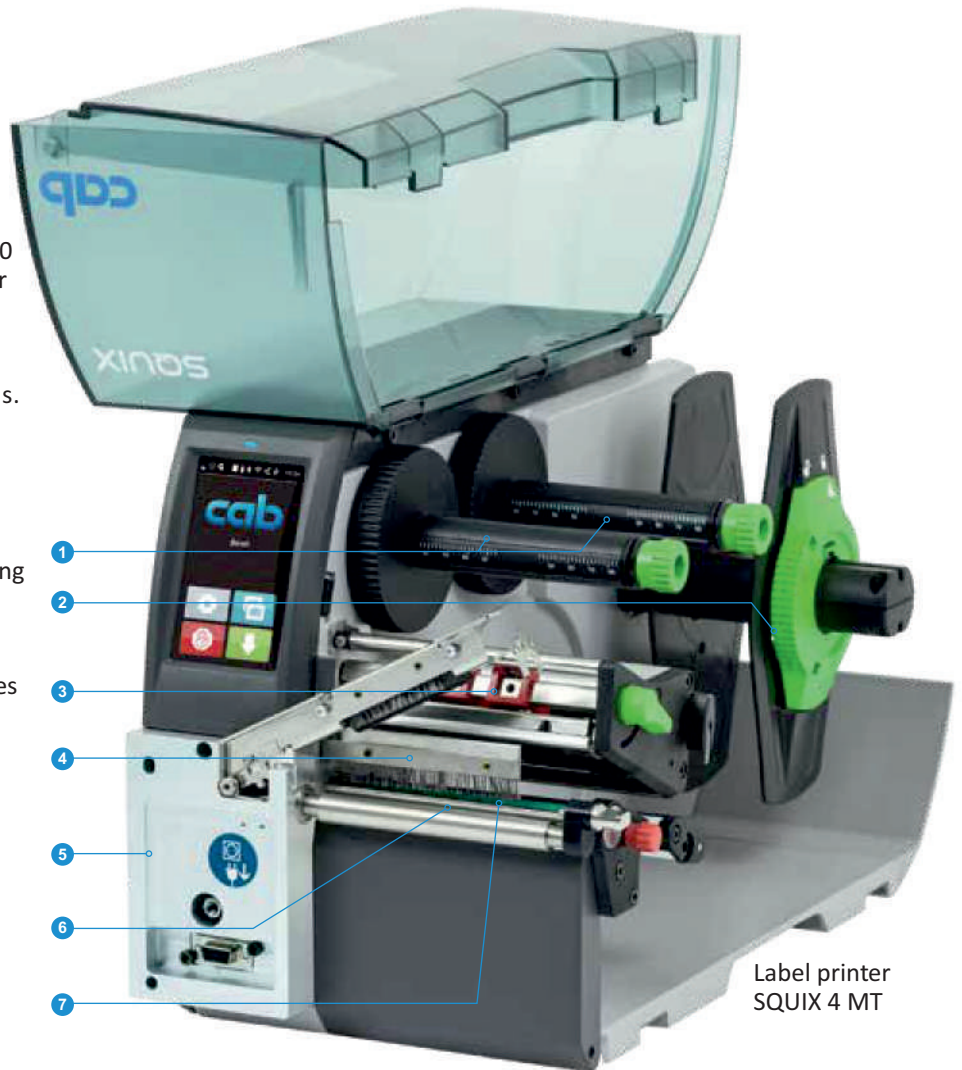

Label printer SQUIX 4 MT



Marketed in India by:



sales@jayinst.com
www.jayinst.com

JAY INSTRUMENTS AND SYSTEMS PRIVATE LIMITED

Head Office :

E-16, Everest, Tardeo Road,
Mumbai - 400 034.
Tel. : +91-22-2352 6207 / 8,
Fax. : +91-22-2352 6210

Branches : Ahmedabad, Baroda, Bengaluru, Chennai, Delhi, Hubballi, Hyderabad, Tiruppur.

Navi Mumbai Office :

C-64, TTC - Industrial Area, Turbhe,
Navi Mumbai - 400 703.
Tel. : +91-22-2767 2955 / 0092